


inateck®

BCS70-HD Bluetooth Wireless Barcode Scanner



**Ready to Use, No Drivers or
Adapter Required!**

Immediate bluetooth connection

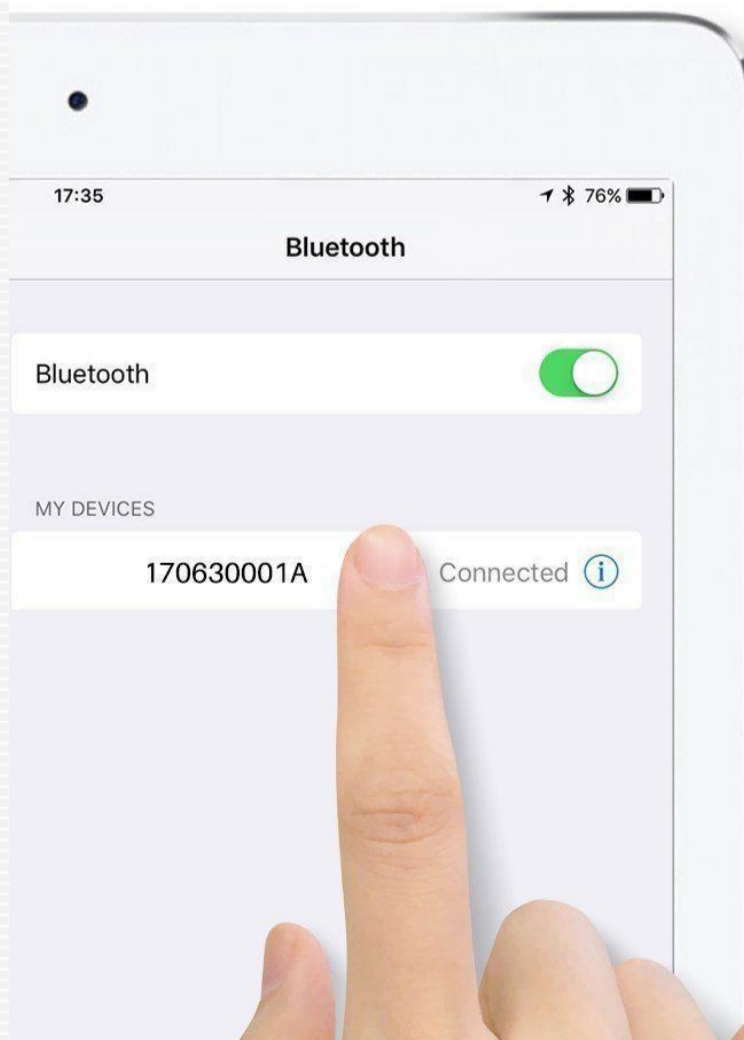

Windows



Mac OS



Linux



Raspberry Pi




iOS



Android



 **Kann alle 1D-strichcodes erkennen** Able to identify all 1D barcodes Può leggere tutti codici 1D Capable d'identifier tous les codes 1D

Transmission Range up to 35 Meters under Proper Conditions.

When out of transmission range, barcodes
will be automatically saved in the scanner,
up to 5000 may be stored.



One Charge lasts approximately 15 days.

Advanced power management technology and 2600mAh built-in battery support continuous scanning up to 80,000 times after a full charge.



Industrial Level Anti-shock Support

Withstands repeated 6 ft. (1.8m) drops to concrete

✓ 1.8m Drop



PHYSICAL CHARACTERISTICS

Model Number	Inateck BCS70-HD
Material	PC+TPU
Size	Length 92mm*Width 69mm* Height 162mm
Weight	200g
Voltage	DC 5V
Battery Capacity	2600mAh

PERFORMANCE CHARACTERISTICS

Light Source	Laser LED 655 ± 5nm
Sensor	Linear image sensor
EEPROM	256K, can store thousands of barcodes
Applicable Barcodes	Codabar, Code 11, Code 128, Code39, Code 93, EAN-8, EAN-13, ISBN, ISSN, MSI,UPC-A, UPC-E, IATA 25, Industrial 25 / Standard 25, Interleaved 25,Matrix 25, China Postal Code,FedEx,USPS, code 32, VIN
Resolution	3mil
Decode Rate	200 times/s
Decode Mode	Single-Line Aiming
Scanning mode	Automatic mode /Manual mode
Nominal Working Distance	4~40cm
Scan Width	400mm @ 400mm
Print Contrast	20%
Decode Angles	Roll 30o,Pitch 75o,Yaw 80o
Cylinder Horizontal Scan	Diameter 20mm
Indication	Buzzer, LED
Interfaces	USB
Wireless Range	40m
Continuous Scanning times	100000 times
EMC	CE , FCC, RoHS, FDA, IEC62133, UN38.3

USER ENVIRONMENT

Operating Temp.	0 a 50° C / 32 a 122° F
Storage Temp.	0 a 50° C / 32 a 122° F
Operating Humidity	20-85% (non-condensing)
Storage Humidity	20-85% (non-condensing)